


Terminal blocks

Klippon® Connect - SNAP INto the Future

The world's first terminal blocks with innovative SNAP IN technology

SNAP IN 

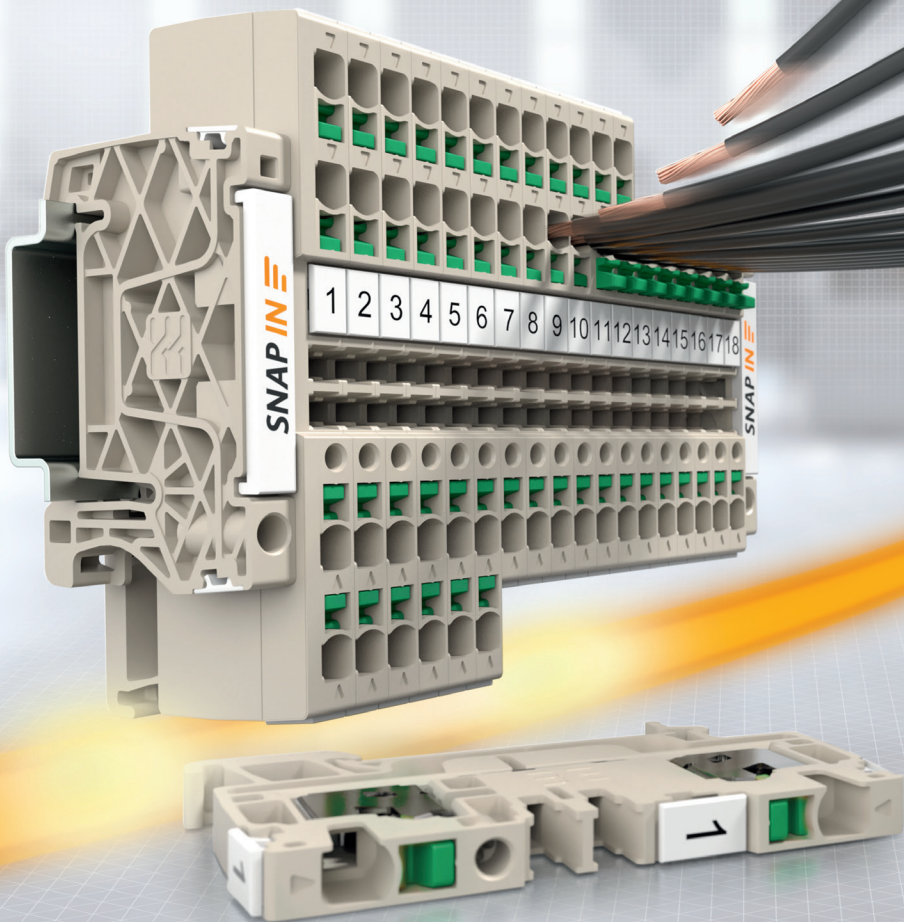


Weidmüller 

The Worldwide Novelty from the Pioneer of Industrial Connectivity

Klippon® Connect terminal blocks with innovative SNAP IN technology

Time is money. For this reason, installation work in control cabinet construction must be carried out even faster, preferably automated. At the same time, the connections should be permanently reliable, safe and easy to maintain.

The new Klippon® Connect terminal blocks with Weidmuller's revolutionary SNAP IN technology meet all these requirements - and are extremely easy to use: railpiped fine-stranded conductors just need to be inserted into the connection point, and the connection point snaps shut with a clearly audible click. The conductor is permanently and reliably contacted. To release the connection, press the green pusher. It couldn't be faster or easier.

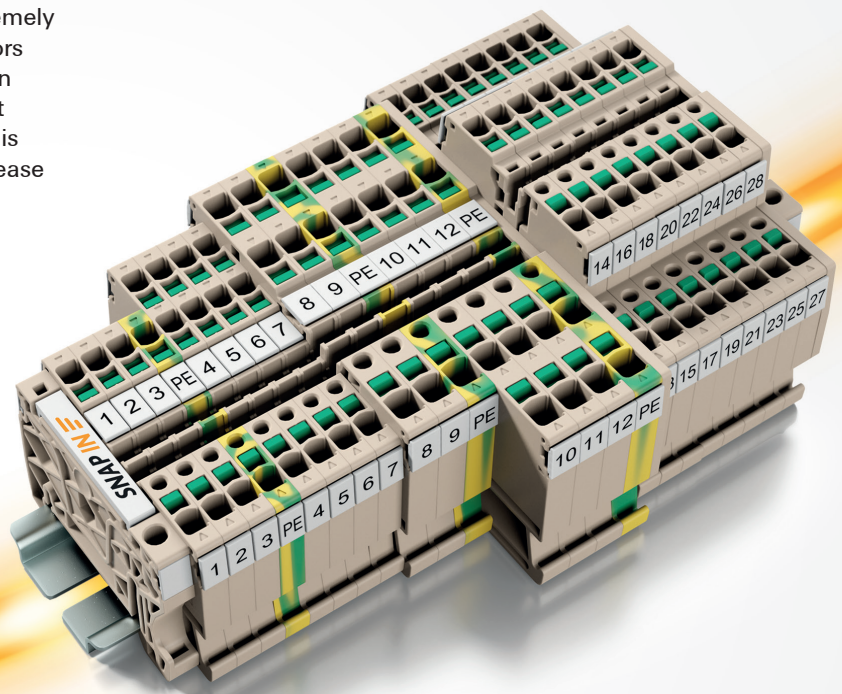

SNAP IN

Weidmuller's revolutionary SNAP IN connection technology will take your wiring processes to a whole new level.

Achieving added value at all stages of panel building

The planning phase is crucial for the success and cost-effectiveness of the entire panel building process, and requires the intelligent interplay of digital product data and interconnected engineering tools.

Efficient, easy wiring is key to installation. Our products stand out in this respect with their intuitive handling and clear design. All terminal functions can be distinguished from each other instantly.

Our Klippon® Connect products feature standardized test points which make automated testing and checking processes possible. In this way, maintenance and testing tasks can be carried out much more safely and faster.

Quick, Simple and Safe – Just SNAP IN

Your benefits at a glance



Thanks to the self-releasing connection mechanism, the SNAP IN technology can be connected in record time.



Simple and tool-free connection of flexible and fine-stranded conductors even without a wire end ferrule. Simply insert the railped conductor into the pre-loaded connection point.



Safety you can hear!
A clear "click" sound signals the safe and gas-tight connection of the conductor.



With the innovative SNAP IN connection, fully automated wiring processes become reality.



Complete terminal rails can be planned digitally via the Weidmuller Configurator (WMC) and ordered - including accessories.



With our "Fast Delivery Service," the fully assembled terminal rails are delivered directly to you.


Pioneers in Industrial Connectivity

Being a pioneer means reinventing yourself time and time again

More than 75 years of experience, several billion connections manufactured, and countless hours of development, make Weidmuller terminal blocks the safest and most powerful on the market.

1948


SAK-Series



First plastic isolated terminal block

1978


DSK-Series



First terminal block with direct plug in technology

1983


W-Series



First terminal block with self locking clamping yoke technology

1993

Z-Series




First terminal block from Weidmuller with tension clamp technology



SNAP IN


2022

S-Series

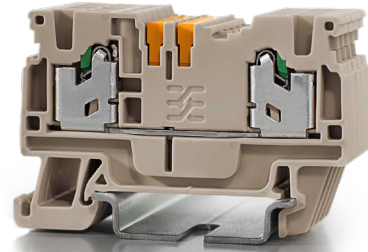

2004

P-Series



First terminal block family from Weidmuller with PUSH IN technology

2016

A-Series





First terminal block family with PUSH IN technology with pushers and application products

First terminal block family with SNAP IN technology

Klippon® Connect with SNAP IN Technology: For an Acceleration of your Wiring Processes

Klippon® Connect terminal blocks with SNAP IN technology revolutionize the wiring of control cabinets with their intuitive and simple handling. The preloaded clamping point allows direct and tool-free wiring of solid and flexible conductors even without ferrules. The reduction of wire preparation speeds up your wiring times and leads to a more efficient installation process.

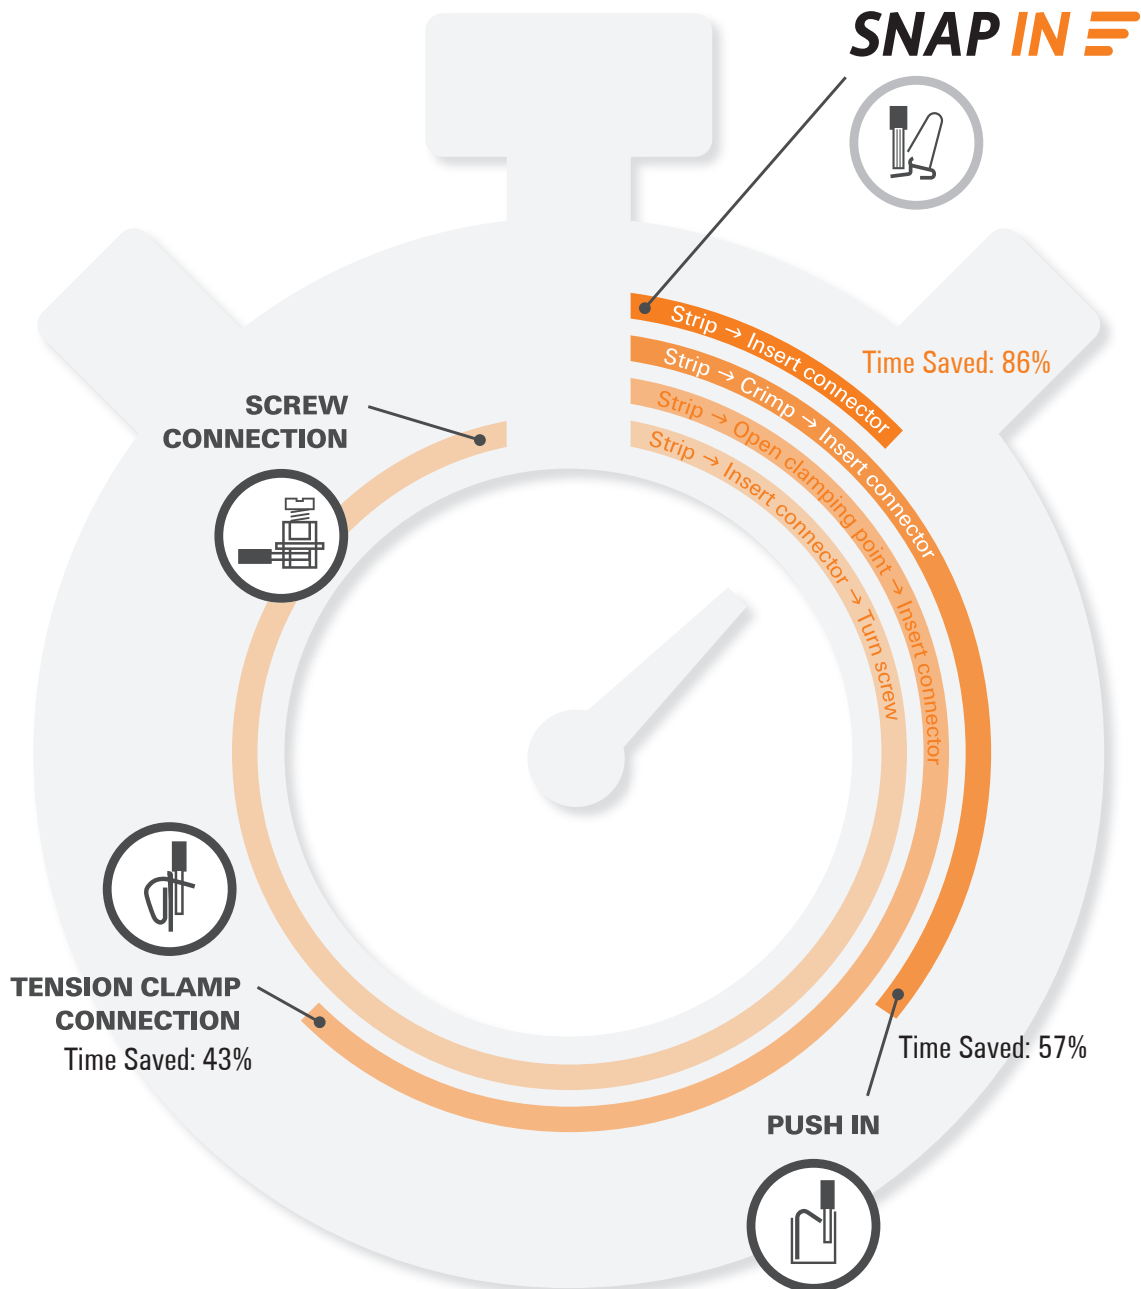
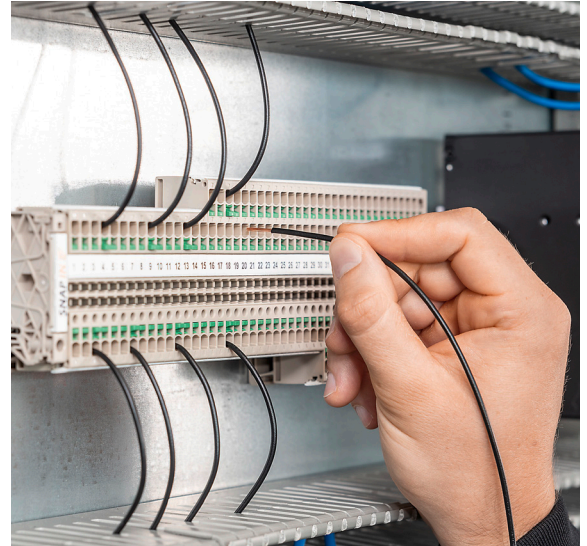


Klippon® Connect with SNAP IN Technology: For Guaranteed and Safe Conductor Connection

The pre-tensioned contact point technology allows flexible conductors without wire-end ferrules to be plugged in directly with low insert force. A special tool is not required.


Once the conductor is inserted correctly and deeply enough into the contact point, the contact point is reliably triggered. Reliable contacting of the conductor guarantees that the wire connection is protected against vibration, gas-tight and stable for the long-term.

In addition to the audible “click,” the pusher is raised to indicate the secure connection. Klippon® Connect rail-mounted terminal blocks with innovative SNAP IN technology ensure maximum process reliability.

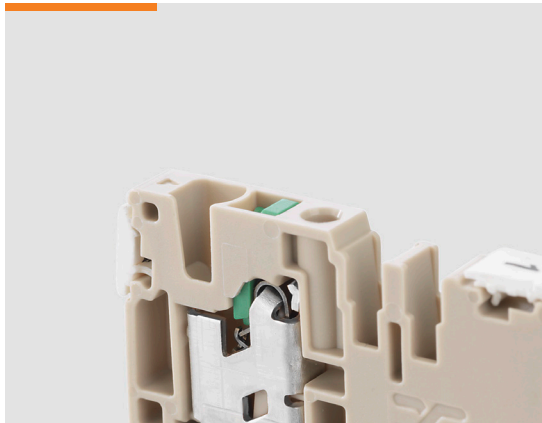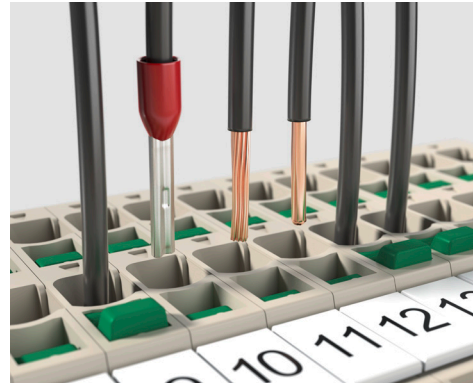


Step 1

The terminal blocks are delivered with pre-loaded spring. The status of the pre-loaded terminal block is signaled by the height position of the pusher.

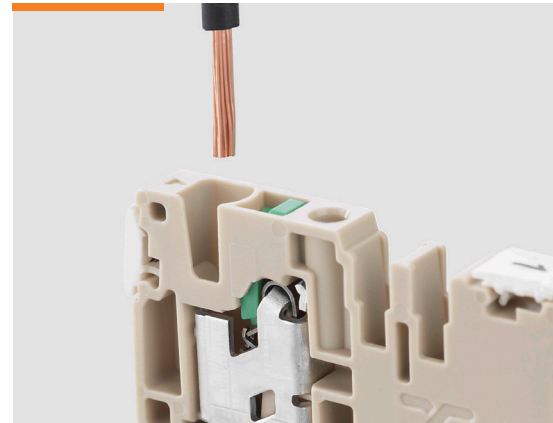


Step 2

Railpiped wires could be easily and safely inserted into the clamping point without further preparation.

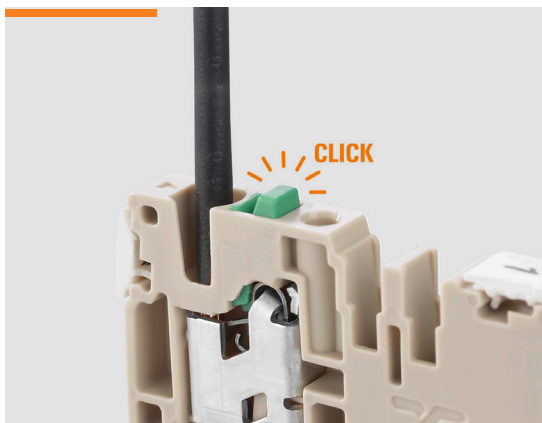

Step 3

The conductor is contacted in the clamping point with a clear “click.” A raised pusher shows the triggered clamping point.

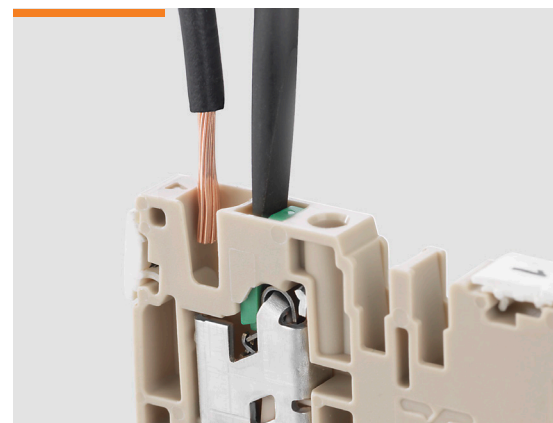

Step 4

By pressing the pusher, the conductor can be quickly and easily released at any time and the clamping point pre-loaded again.


Klippon® Connect with SNAP IN Technology: For the Automation of the Future

Increasing automation in panel building is posing new requirements for future terminal blocks. These requirements were already taken into account during the development phase. The optimized design supports a robot-assisted assembly. Pre-assembled markers in combination with the Klippon® Automated RailLaser enable automated marking of the terminal rail. The open connection point of the S-series - "ready to wire" - also enables robot-assisted wiring of the terminal rail.

Automated assembly with Klippon® Automated RailAssembler

With automated production processes, errors can be avoided, workflows accelerated, and costs reduced.

This works best with solutions built upon each other and thought through down to the last detail. The contours of the new SNAP IN S-Series terminal blocks have been designed to be easily gripped and mounted by industrial robots. This means there is no obstacle to automated assembly today.

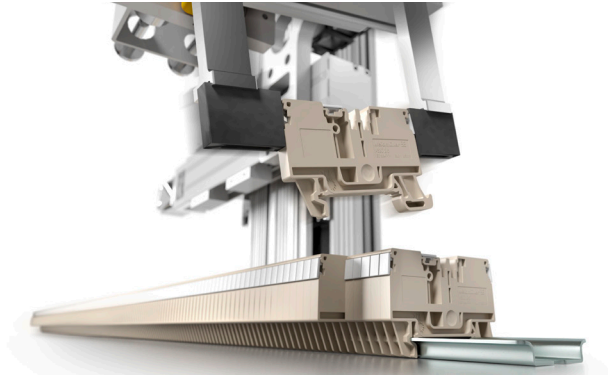


Automated marking with Klippon® Automated RailLaser

Marking terminal blocks is a time-consuming process with a high risk of error. SNAP IN S-Series terminal block design has therefore been optimized for fully automated laser marking, which saves time – up to 90%. The Klippon® Automated RailLaser, in conjunction with the Weidmuller Configurator (WMC), achieves maximum marking quality and error-proofing.

Automated wiring

Full order books and a growing lack of skilled workers are driving digitalization and automation in control cabinet production. That is why Klippon® Connect SNAP IN terminal blocks are already prepared for tomorrow's automation processes. The simple and safe handling of SNAP IN technology facilitates the use of automated wiring processes and prevents incorrect wiring.

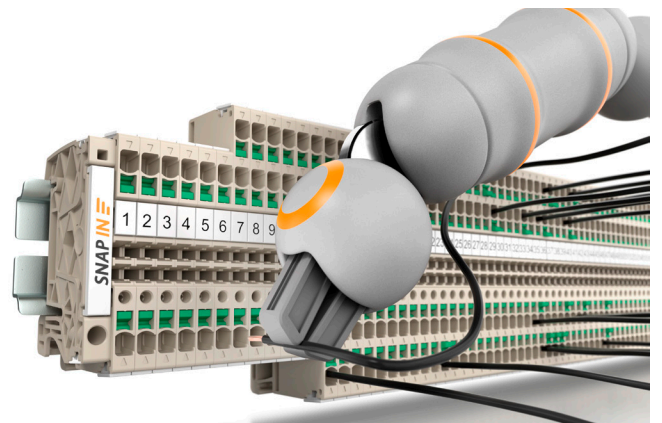

Take a closer look at the Klippon® Automated RailAssembler. Just scan the QR code to watch the video.




Take a closer look at the Klippon® Automated RailLaser. Just scan the QR code to watch the video.

S2C 2.5

2.5 mm²

SNAP IN



Width / height / depth	mm
Max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 59 x 38
24 / 2.5
0.5...2.5

Technical data

Rated data	
Rated voltage	V
Rated current	A
For wire cross-section	mm ²
Rated impulse withstand voltage / pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / stranded	mm ²
Flexible / flexible with ferrule	mm ²
Railpin length / blade size	mm/-
Note	

IEC 60947-7-1				
IEC	UL	CSA	EN 60079-7	
800	600	600		
24	20	15		
2.5	AWG 22...12	AWG 20...14		
8 kV / 3				
A2 / V-0				
Rated connection				
0.5...2.5 / 0.5...2.5				
0.5...2.5 / 0.5...2.5				
10 / 0.6 x 3.5 mm				
Note				

Ordering data

Version	
	dark beige
	blue
	orange
Note	

Type	Qty.	Order No.
S2C 2.5	100	2674530000
S2C 2.5 BL	100	2753940000
S2C 2.5 DL	100	2862960000
Note		

Accessories


Cross connection pluggable	
	2-pole
	10-pole
	2-pole
	10-pole
Vertical-bridge	
	1-pole
End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	standard
Marking tags	

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
Vertical-bridge		
End plate		
End bracket		
SEP 2C 2.5	20	2751080000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
Test adapter		
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 M-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
Test plug		
PS 2.0 MC	20	0310000000
Screwdriver		
SDIL 0,6X3,5X100	1	2749140000
Marking tags		
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
Note		

S3C 2.5

2.5 mm²

SNAP IN



5.1 x 71.5 x 38
24 / 2.5
0.5...2.5

IEC 60947-7-1				
IEC	UL	CSA	EN 60079-7	
800	600	600		
24	20	15		
2.5	AWG 22...12	AWG 20...14		
8 kV / 3				
A2 / V-0				
Rated connection				
0.5...2.5 / 0.5...2.5				
0.5...2.5 / 0.5...2.5				
10 / 0.6 x 3.5 mm				
Note				


Type	Qty.	Order No.
S3C 2.5	100	2674540000
S3C 2.5 BL	100	2753950000
S3C 2.5 DL	100	2862970000
Note		

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
Vertical-bridge		
End plate		
End bracket		
SEP 3C 2.5	20	2751090000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
Test adapter		
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 M-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
Test plug		
PS 2.0 MC	20	0310000000
Screwdriver		
SDIL 0,6X3,5X100	1	2749140000
Marking tags		
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
Note		

S4C 2.5

2.5 mm²

SNAP IN



5.1 x 84 x 38
24 / 2.5
0.5...2.5



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600	600	
24	20	15	
2.5	AWG 22...12	AWG 20...14	
8 kV / 3			
A2 / V-0			

CE

Rated connection

0.5...2.5 / 0.5...2.5
0.5...2.5 / 0.5...2.5
10 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S4C 2.5	100	2674550000
S4C 2.5 BL	100	2753960000
S4C 2.5 DL	100	2862980000

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
SEP 4C 2.5	20	2751100000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

S2C 4

4 mm²

SNAP IN



6.1 x 62 x 41.5
32 / 4
0.5...4



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
32	30		
4	AWG 20...10		
8 kV / 3			
A4 / V-0			

CE

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
12 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S2C 4	100	2874820000
S2C 4 BL	100	2874830000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
SEP 2C 4		2874790000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 4 MI-R	0,2 A 50	1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000

S3C 4

4 mm²

SNAP IN



6.1 x 78 x 41.5
32 / 4
0.5...4



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
32	30		
4	AWG 20...10		
8 kV / 3			
A4 / V-0			

CE

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
12 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S3C 4	50	2874840000
S3C 4 BL	50	2874850000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
SEP 3C 4		2874800000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 4 MI-R	0,2 A 50	1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000

S4C 4

4 mm²

SNAP IN



Width / height / depth	mm
Max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 94 x 41.5
32 / 4
0.5...4

Technical data

Rated data	
Rated voltage	V
Rated current	A
For wire cross-section	mm ²
Rated impulse withstand voltage / pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / stranded	mm ²
Flexible / flexible with ferrule	mm ²
Railpin length / blade size	mm/-
Note	

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
32	30		
4	AWG 20...10		
	8 kV / 3		
	A4 / V-0		

CE

Rated connection	
0.5...4 / 0.5...4	
0.5...4 / 0.5...4	
12 / 0.6 x 3.5 mm	

Ordering data

Version	
	dark beige
	blue
	orange
Note	

Type	Qty.	Order No.
S4C 4	50	2874860000
S4C 4 BL	50	2874870000
Note		

Accessories


Cross connection pluggable	
	2-pole
	10-pole
	2-pole
	10-pole
Vertical-bridge	
	1-pole
End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	standard
Marking tags	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
Note		
SEP 4C 4	20	2874810000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
Note		
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 4 MI-R	0,2 A 50	1991860000
Note		
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
Note		
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000

S2T 2.5

2.5 mm²

SNAP IN



5.1 x 90 x 50.5
24 / 2.5
0.5...2.5

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
24	20		
2.5	AWG 22...12		
	8 kV / 3		
	A2 / V-0		

CE

Rated connection	
0.5...2.5 / 0.5...2.5	
0.5...2.5 / 0.5...2.5	
10 / 0.6 x 3.5 mm	

Type	Qty.	Order No.
S2T 2.5	50	2902380000
S2T 2.5 BL	50	2902390000
S2T 2.5 OR	50	2902400000
Note		


Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
Note		
ZVQ 2.5/1.5	24 A 50	1720700000
Note		
SEP 2T 2.5		2902630000
Note		
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
Note		
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
Note		
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
Note		
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

For detailed information on other accessories and applications, visit <https://catalog.weidmueller.com/>


S2T 2.5 VL

2.5 mm²

SNAP IN



5.1 x 90 x 50.5
24 / 2.5
0.5...2.5



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
24	20		
2.5	AWG 22...12		
8 kV / 3			
A2 / V-0			

CE

Rated connection
0.5...2.5 / 0.5...2.5
0.5...2.5 / 0.5...2.5
10 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S2T 2.5 VL	50	2902430000
S2T 2.5 VL BL	50	2902440000
S2T 2.5 VL OR	50	2902450000

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
SEP 2T 2.5		2902630000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

S2T 2.5 FT-PE

2.5 mm²

SNAP IN



5.1 x 90 x 50.5
24 / 2.5
0.5...2.5



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
24	20		
2.5	AWG 22...12		
8 kV / 3			
A2 / V-0			

CE

Rated connection
0.5...2.5 / 0.5...2.5
0.5...2.5 / 0.5...2.5
10 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S2T 2.5 FT-PE	50	2902410000

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
SEP 2T 2.5		2902630000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000


S2T 2.5 N-FT

2.5 mm²

SNAP IN



5.1 x 90 x 50.5
24 / 2.5
0.5...2.5



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
24	20		
2.5	AWG 22...12		
8 kV / 3			
A2 / V-0			

CE

Rated connection
0.5...2.5 / 0.5...2.5
0.5...2.5 / 0.5...2.5
10 / 0.6 x 3.5 mm

Typ	Qty.	Order No.
S2T 2.5 N-FT	50	2902420000


Typ	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
ZVQ 2.5/1.5	24 A 50	1720700000
SEP 2T 2.5		2902630000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

**Spring connection with SNAP IN technology (S-Series)
PE terminal blocks**

S2C 2.5 PE


2.5 mm²

SNAP IN



Width / height / depth	mm
Max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 59 x 38
/ 2.5
0.5...2.5



Technical data

Rated data	
For wire cross-section	mm ²
Rated voltage to adjacent terminal	V/-
Rated current to adjacent terminal	-
Short-term current capability	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / stranded	mm ²
Flexible / flexible with ferrule	mm ²
Railping length / blade size	mm/-
Note	

IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12	AWG 20...14	
800 /			
300 A (2.5 mm ²)			
3			
A2 / V-0			

CE

Rated connection	
0.5...2.5 / 0.5...2.5	
0.5...2.5 / 0.5...2.5	
10 / 0.6 x 3.5 mm	

Ordering data

Version	green-yellow
Note	

Type	Qty.	Order No.
S2C 2.5 PE	50	2674560000

Accessories


End plate	dark beige
End bracket	dark beige, screwable dark beige, direct mounting
Test adapter	1-pole stackable 3-pole 5-pole
Test plug	
Screwdriver	standard
Marking tags	

Type	Qty.	Order No.
SEP 2C 2.5	20	2751080000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

S3C 2.5 PE

2.5 mm²

SNAP IN



Width / height / depth	mm
Max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 71.5 x 38
/ 2.5
0.5...2.5



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12	AWG 20...14	
800 /			
300 A (2.5 mm ²)			
3			
A2 / V-0			

CE

Rated connection	
0.5...2.5 / 0.5...2.5	
0.5...2.5 / 0.5...2.5	
10 / 0.6 x 3.5 mm	

Type	Qty.	Order No.
S3C 2.5 PE	50	2674570000


Type	Qty.	Order No.
SEP 3C 2.5	20	2751090000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

For detailed information on other accessories and applications, visit <https://catalog.weidmueller.com/>

S4C 2.5 PE

2.5 mm²

SNAP IN



5.1 x 84 x 38
/ 2.5
0.5...2.5



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12	AWG 20...14	
800 /			
300 A (2.5 mm ²)			
3			
A2 / V-0			

CE

Rated connection

0.5...2.5 / 0.5...2.5

0.5...2.5 / 0.5...2.5

10 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S4C 2.5 PE	50	2674580000

Type	Qty.	Order No.
SEP 4C 2.5	20	2751100000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A	50 1991890000
ATPG 2.5 MI-R	0,2 A	50 1991960000
ATPG 2.5/3	0,2 A	25 2041190000
ATPG 2.5/5	0,2 A	25 2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000


S2C 4 PE

4 mm²

SNAP IN



6.1 x 62 x 41.5
/ 4
0.5...4



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
4	AWG 20...10		
800 /			
480 A (4 mm ²)			
3			
A4 / V-0			

CE

Rated connection

0.5...4 / 0.5...4

0.5...4 / 0.5...4

12 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S2C 4 PE	50	2874880000

Type	Qty.	Order No.
SEP 2C 4		2874790000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A	50 1991890000
ATPG 4 MI-R	0,2 A	50 1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000


S3C 4 PE

4 mm²

SNAP IN



6.1 x 78 x 41.5
/ 4
0.5...4



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
4	AWG 20...10		
800 /			
480 A (4 mm ²)			
3			
A4 / V-0			

CE

Rated connection

0.5...4 / 0.5...4

0.5...4 / 0.5...4

12 / 0.6 x 3.5 mm

Type	Qty.	Order No.
S3C 4 PE	50	2874890000


Type	Qty.	Order No.
SEP 3C 4		2874800000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A	50 1991890000
ATPG 2.5 MI-R	0,2 A	50 1991960000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000

Spring connection with SNAP IN technology (S-Series)
PE terminal blocks

S4C 4 PE

4 mm²

SNAP IN



Width / height / depth	mm
Max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 94 x 41.5
/ 4
0.5...4

Technical data

Rated data	
For wire cross-section	mm ²
Rated voltage to adjacent terminal	V/-
Rated current to adjacent terminal	-
Short-term current capability	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / stranded	mm ²
Flexible / flexible with ferrule	mm ²
Railping length / blade size	mm/-
Note	

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
4	AWG 20...10		
800 /			
480 A (4 mm ²)			
3			
A4 / V-0			
CE			
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
12 / 0.6 x 3.5 mm			
Note			

Ordering data

Version	green-yellow
Note	

Type	Qty.	Order No.
S4C 4 PE	50	2874900000
Note		

Accessories


End plate	dark beige
End bracket	dark beige, screwable dark beige, direct mounting
Test adapter	1-pole stackable 3-pole 5-pole
Test plug	
Screwdriver	standard
Marking tags	

Type	Qty.	Order No.
SEP 4C 4		2874810000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 4 MI-R	0,2 A 50	1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000
Note		

S2T 2.5 PE

2.5 mm²

SNAP IN



5.1 x 90 x 50.5

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12		
800 /			
300 A (2.5 mm ²)			
3			
A2 / V-0			
CE			
Rated connection			
0.5...2.5 / 0.5...2.5			
0.5...2.5 / 0.5...2.5			
10 / 0.6 x 3.5 mm			
Note			

Type	Qty.	Order No.
S2T 2.5 PE	50	2902460000
Note		

Type	Qty.	Order No.
SEP 2T 2.5		2902630000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
Note		

For detailed information on other accessories and applications, visit <https://catalog.weidmueller.com/>

Weidmuller – Your Partner in Smart Industrial Connectivity

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Industrial Connectivity.

Weidmuller, Inc

821 Southlake Blvd.
Richmond, Virginia 23236
Telephone: (800) 849-9343
Facsimile: (804) 379-2593
Website: www.weidmuller.com
Email: customerservice@weidmuller.com

Personal support can
be found on our website:
www.weidmuller.com/contact

USA Version
02/24 | LIT2016